


**MSZ-FS06NA & MUZ-FS06NA**  
**6,000 BTU/H DELUXE WALL-MOUNTED INDOOR UNIT**  
**6,000 BTU/H HYPER-HEATING OUTDOOR UNIT**



Job Name:

System Reference:

Date:

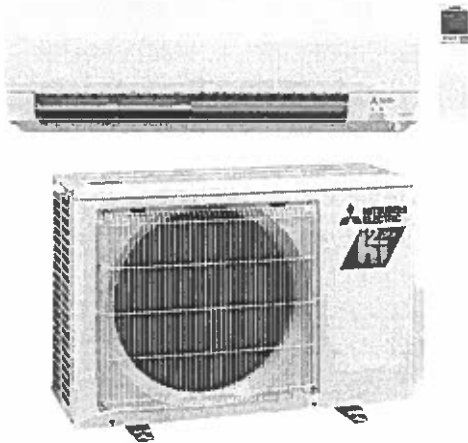

Indoor Unit

MSZ-FS06NA

Outdoor Unit

MUZ-FS06NA

**INDOOR UNIT FEATURES**

- Slim wall-mounted indoor units provide zone comfort control
- Dual Barrier Coating applied to the heat exchanger, vanes and fan to prevent hydrophilic and hydrophobic dirt build-up
- Multiple fan speed options: Quiet, Low, Medium, High, Super-high, Auto
- 3D i-see Sensor® enables advance features:
  - Indirect or Direct Airflow for personalized comfort
  - Absence Detection for energy-saving mode
- Double Vane features:
  - Separates airflow to deliver air across a large area
  - Simultaneously deliver to air separate sections of a room
  - Generates more comfortable natural airflow pattern
- Multiple control options available:
  - Back-lit screen handheld remote controller (provided with unit)
  - kumo cloud® smart device app for remote access
  - Third-party interface options
  - Wired or wireless controllers
- Triple-action Filtration: Nano Platinum Filter, Deodorizing Filter, & Electrostatic Anti-Allergy Enzyme Filter
- Hot-Start Technology: no cold air rush at equipment startup or when restarting after Defrost Cycle
- Quiet operation

**OUTDOOR UNIT FEATURES**

- INVERTER-driven compressor and LEV provide high efficiency and comfort while using only the energy needed to maintain maximum performance
- H2i plus™ performance offers 100% heating capacity at -5° and 70% to 81% heating capacity at -13° F
- Blue Fin anti-corrosion treatment applied to the outdoor unit heat exchanger for increased coil protection and longer life

Installation of (2) 6k 1:1s  
ensers mounted to  
oundation to the left  
ight of the existing  
ondenser. Confirmed  
JB from Service  
g SV that we have  
gh space to install a  
enser to the right of  
existing 24k  
enser.

ing linesets &  
ide from 6ks would  
ttended to each new  
enser.

n 6k IDU for the  
g Room would be  
ected to the existing  
ondenser.



Lineset from new 6k  
to exit semi-finished  
basement and  
connect to existing  
24k condenser