





- **Permit Authorizations.** Owner hereby authorizes ReVision Energy to act as Owner's Agent for the limited purpose of applying for and obtaining any permit or approval from each Authority Having Jurisdiction that may be required for the installation of the Renewable Energy System described in this Contract to be located on Owner's property.

#### 4.6 Cancellation/Refunds Due to Required Structural Modifications

After any structural review required by state or local building officials, Contractor will review any required modifications with Owner. If it is determined that required structural upgrades are cost prohibitive, Owner will have the right to cancel the contract and receive a deposit refund, less costs already incurred by contractor prior to cancellation.

**You may CANCEL this transaction, without any penalty or obligation, within three business days from the day on which you sign this contract.**

This Contract is entered into as of the day and year first written above.

ReVision Energy	Owner
Sign: 	Sign: 
Print: Fortunat Meuller, President	Print: Stephanie Laflam
Date: January 24, 2022	Date: Jan 25 2022 15:45 EST

Job Name:	
System Reference:	Date:



Outdoor Unit: MXZ-3C24NAHZ2

## ACCESSORIES

The outdoor unit is delivered with the base pan heater factory installed.

- ☐ Airflow Guide (PAC-SH96SG-E)
- ☐ 3/8" x 1/2" Port Adapter (MAC-A454JP-E)
- ☐ 1/2" x 3/8" Port Adapter (MAC-A455JP-E)
- ☐ 1/2" x 5/8" Port Adapter (MAC-A456JP-E)
- ☐ M-NET Adapter (PAC-IF01MNT-E)

(For data on specific indoor units, see the MXZ-C Technical and Service Manual.)

Specifications			Model Name
Unit Type			MXZ-3C24NAHZ2
Cooling* (Non-ducted / Ducted)	Rated Capacity	Btu/h	22,000 / 23,600
	Capacity Range	Btu/h	6,000 - 23,600
	Rated Total Input	W	1,630 / 2,360
Heating at 47°F* (Non-ducted / Ducted)	Rated Capacity	Btu/h	25,000 / 24,600
	Capacity Range	Btu/h	7,200 - 30,600
	Rated Total Input	W	1,725 / 1,871
Heating at 17°F* (Non-ducted/Ducted)	Rated Capacity	Btu/h	14,000 / 14,000
	Maximum Capacity	Btu/h	25,000 / 24,600
	Rated Total Input	W	1,622 / 1,635
Heating at 5°F*	Maximum Capacity	Btu/h	25,000
Energy Star® (ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.)			Yes
Electrical Requirements	Power Supply	Voltage, Phase, Hertz	208 / 230V, 1-Phase, 60 Hz
	Recommended Fuse/Breaker Size	A	40
	MCA	A	30.5
Voltage	Indoor - Outdoor S1-S2	V	AC 208 / 230
	Indoor - Outdoor S2-S3	V	DC ±24
Compressor			DC INVERTER-driven Twin Rotary
Fan Motor (ECM)		F.L.A.	2.43
Sound Pressure Level (Non-ducted/Ducted)	Cooling	dB(A)	54
	Heating		58
External Dimensions (H x W x D)		In / mm	41-9/32 x 37-13/32 x 13 1048 x 950 x 330
Net Weight		Lbs / kg	189 / 86
External Finish			Munsell No. 3Y 7.8/11
Refrigerant Pipe Size O.D. — Eight Ports	Liquid (High Pressure)	In / mm	1/4 / 6.35
	Gas (Low Pressure)		A:1/2 / 12.7 ; B,C: 3/8 / 9.52
Max. Refrigerant Line Length		Ft / m	230 / 70
Max. Piping Length for Each Indoor Unit		Ft / m	82 / 25
Max. Refrigerant Pipe Height Difference	If IDU is Above ODU	Ft / m	49 / 15
	If IDU is Below ODU		49 / 15
Connection Method			Flared/Flared
Refrigerant			R410A

\* Rating Conditions per AHRI Standard:

Cooling | Indoor: 80°F (27°C) DB / 67°F (19°C) WB

Cooling | Outdoor: 95°F (35°C) DB / WB: 23.9°C (75°F)

Heating at 47°F | Indoor: 70°F (21°C) DB / 60°F (16°C) WB

Heating at 47°F | Outdoor: 47°F (8°C) DB / 43°F (6°C) WB

Heating at 17°F | Indoor: 70°F (21°C) DB

Heating at 17°F | Outdoor: 17°F (-8°C) DB / 15°F (-9°C) WB


**MSZ-FS06NA & MUZ-FS06NAH**  
6,000 BTU/H DELUXE WALL MOUNT  
6,000 BTU/H HYPER-HEATING OUTDOOR UNIT W/BASE PAN HEATER



Job Name:

System Reference:

Date:

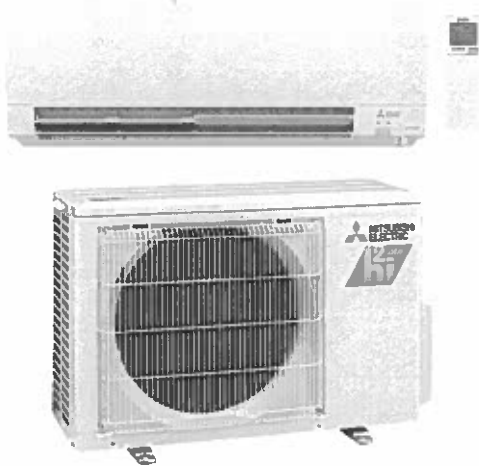

Indoor Unit \_\_\_\_\_ MSZ-FS06NA

Outdoor Unit \_\_\_\_\_ MUZ-FS06NAH

#### INDOOR UNIT FEATURES

- Slim wall-mounted indoor units provide zone comfort control
- Dual Barrier Coating applied to the heat exchanger, vanes and fan to prevent hydrophilic and hydrophobic dirt build-up
- Multiple fan speed options: Quiet, Low, Medium, High, Super-high, Auto
- 3D i-see Sensor® enables advance features:
  - Indirect or Direct Airflow for personalized comfort
  - Absence Detection for energy-saving mode
- Double Vane features:
  - Separates airflow to deliver air across a large area
  - Simultaneously deliver to air separate sections of a room
  - Generates more comfortable natural airflow pattern
- Multiple control options available:
  - Back-lit screen handheld remote controller (provided with unit)
  - kumo cloud® smart device app for remote access
  - Third-party interface options
  - Wired or wireless controllers
- Triple-action Filtration: Nano Platinum Filter, Deodorizing Filter, & Electrostatic Anti-Allergy Enzyme Filter
- Hot-Start Technology: no cold air rush at equipment startup or when restarting after Defrost Cycle
- Quiet operation
- The outdoor unit powers the indoor unit, and should a power outage occur, the system is automatically restarted when power returns

#### OUTDOOR UNIT FEATURES

- INVERTER-driven compressor and LEV provide high efficiency and comfort while using only the energy needed to maintain maximum performance
- H2i plus™ performance offers 100% heating capacity at -5° and 70% to 81% heating capacity at -13° F
- Blue Fin anti-corrosion treatment applied to the outdoor unit heat exchanger for increased coil protection and longer life
- Built-in base pan heater


**MSZ-FS15NA & MUZ-FS15NAH**  
15,000 BTU/H DELUXE WALL MOUNT  
15,000 BTU/H HYPER-HEATING OUTDOOR UNIT W/BASE PAN HEATER



Job Name:

System Reference:

Date:

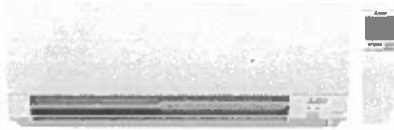

Indoor Unit **MSZ-FS15NA**

Outdoor Unit **MUZ-FS15NAH**





#### INDOOR UNIT FEATURES

- Slim wall-mounted indoor units provide zone comfort control
- Dual Barrier Coating applied to the heat exchanger, vanes and fan to prevent hydrophilic and hydrophobic dirt build-up
- Multiple fan speed options: Quiet, Low, Medium, High, Super-high, Auto
- 3D i-see Sensor® enables advance features:
  - Indirect or Direct Airflow for personalized comfort
  - Absence Detection for energy-saving mode
- Double Vane features:
  - Separates airflow to deliver air across a large area
  - Simultaneously deliver to air separate sections of a room
  - Generates more comfortable natural airflow pattern
- Multiple control options available:
  - Back-lit screen handheld remote controller (provided with unit)
  - kumo cloud® smart device app for remote access
  - Third-party interface options
  - Wired or wireless controllers
- Triple-action Filtration: Nano Platinum Filter, Deodorizing Filter, & Electrostatic Anti-Allergy Enzyme Filter
- Hot-Start Technology: no cold air rush at equipment startup or when restarting after Defrost Cycle
- Quiet operation
- The outdoor unit powers the indoor unit, and should a power outage occur, the system is automatically restarted when power returns

#### OUTDOOR UNIT FEATURES

- INVERTER-driven compressor and LEV provide high efficiency and comfort while using only the energy needed to maintain maximum performance
- H2i plus™ performance offers 100% heating capacity at -5° and 70% to 81% heating capacity at -13° F
- Blue Fin anti-corrosion treatment applied to the outdoor unit heat exchanger for increased coil protection and longer life
- Built-in base pan heater

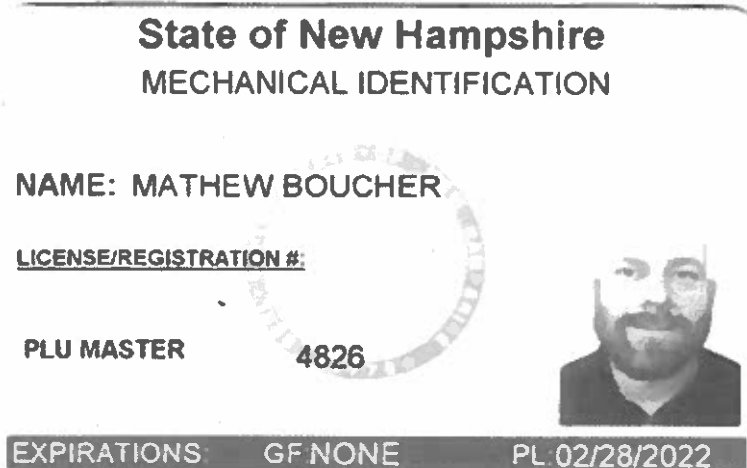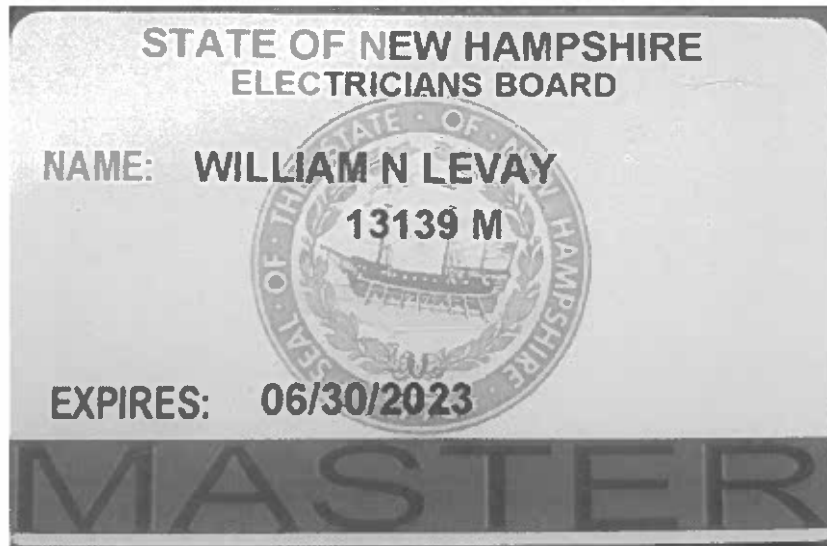



February 17, 2022

Town of Plainfield  
Building Inspector  
PO Box 380  
Meriden, NH 03770

Enclosed is a completed application for a mini split installation at:

**182 Whitaker Rd**

Also included are the necessary requirements needed for the permit, and check for \$50.00. Please let me know if there are fees for this application.

Also note, the customer has authorized ReVision Energy, Inc to apply and obtain any permits necessary for this installation. (Authorization Enclosed)

If you have any questions, or need additional information regarding this application, please feel free to contact me.

Thank you and Enjoy the Sun!

**Sue Morrison**

Employee-Owner | Operations Administrator  
(603) 583-4380 Direct

[ReVision Energy](#), a [Certified B Corp](#)

[Locations](#) in Maine, New Hampshire and Massachusetts

Enjoy the Sun with us: [Blog](#) | [Facebook](#) | [Twitter](#) | [Instagram](#)